




## Mounting Method



1. Loosen the thumb screw on the back of the remote controller to let loose of the rubber case (as marked red in the Figure).

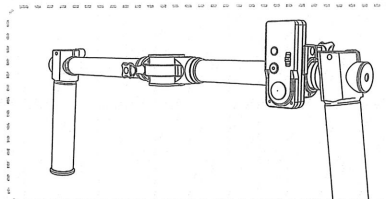

2. Install the remote controller to the extension rod or dual handle for convenient operations (as shown in the Figure above). Fasten up by tightening the thumb screw on the back.

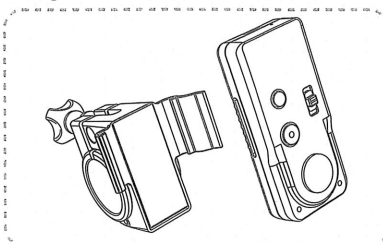

Main body of the remote controller can be easily separated from the mounting buckle for independent use. The mounting buckle is for fix mounting only and will not affect performance of the remote control after separation.

💡 The remote controller turns off automatically when left idle for 2 minutes.

## Specifications

## Specifications:

Charging voltage: 5V  
Charging current: 100mA  
Theoretical work time: ≥30 hr.  
Built-in Polymer lithium battery capacity: 150mAh  
Emission and received current: 11.9mA  
Operating current: 4.2mA  
Effective control distance: 10m /394 inch (without blockage)

**Bluetooth Indicator**  
No connection: Continuous flashing.  
Connected: Shines solid light.

## Power Level Indicator

90%-100%: quick flash for 4 times each second.  
75%-90%: quick flash for 3 times each second.  
55%-75%: quick flash for 2 times each second.  
30%-55%: quick flash for 1 time each second.  
0%-30%: quick flashing.

## Charging Indicator

Charging: RED light.  
Charging complete: GREEN light.



Tel: +86-773-2320856  
Web: www.zhiyun-tech.com  
E-mail: service@zhiyun-tech.com  
Address: Creative Industrial Park, GuiMo Road, QiXing District, Guilin 541004, Guangxi, China.



## ZW-B02 Wireless Remote Control

User Guide V1.0

## Packing List

The product package comes with the following items. In case that any item is found missing, please contact ZHIYUN or your local selling agent.




Wireless Remote Control 1



Micro USB Cable 1



Mounting Buckle 1

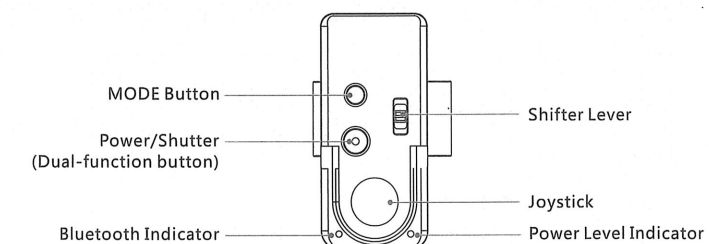

**MODE Button:** Switches between gimbal control modes (works like the MODE button on the stabilizer).

**Power/Shutter (Dual-function button):**

Power on/off:  
Power on/off the remote controller by pressing the Power button for 1 to 2 sec. The indicator light will turn on/off accordingly.

**Combined Button Control**

**Power Button + Shifter Lever:** Push the Shifter Lever in W direction simultaneously when powering up to enter Slave Mode. This allows firmware upgrade of the remote controller through mobile APP (requires Bluetooth pairing with the smartphone using Zhiyun Assistant).

**Power Button + MODE Button:** Press the MODE Button simultaneously when powering up to operate quick pairing with the nearest stabilizer.

**Joystick:** Controls camera movement.

**Shifter Lever:** Allows focusing control of the camera.

*Perfecting the moment*  
zhiyun-tech.com