


# f=135mm V-DSLR ED UMC (for Cinema)

SPECIFICATIONS		1:2.2 135mm ED UMC									
APERTURE RANGE(T-STOP)		T2.2 to T22									
OPTICAL CONSTRUCTION		11 ELEMENTS IN 7 GROUPS									
MINIMUM FOCUSING DISTANCE		0.8m(2.62ft)									
FILTER SIZE		Φ77mm									
MAXIMUM DIAMETER		Φ82mm									
MOUNT		NIKON	CANON EOS	PENTAX K	SONY α	CANON M	FUJIFILM X	SAMSUNG NX	SONY E	FOUR-THIRDS	MICRO FOUR-THIRDS
ANGLE OF VIEW	35mm	18.8°	18.8°	18.8°	18.8°	-	-	-	18.8°	-	-
	APS-C	12.4°	11.7°	12.4°	12.4°	11.7°	12.4°	12.4°	12.4°	-	-
	FOUR-THIRDS 4/3"	-	-	-	-	-	-	-	-	9.5°	9.5°
LENGTH(LENS MOUNT TO FRONT)		119.6mm	122.1mm	120.6mm	121.6mm	148.0mm	148.4mm	140.6mm	148.1mm	127.4mm	146.9mm
WEIGHT(CAP,HOOD DETACHABLE)		820g	835g	825g	830g	845g	885g	835g	845g	850g	840g
GEAR	MODULE	0.8									
	A	7mm									
	B	4mm									
	C	43.8mm									
	D	8mm	10.5mm	9mm	10mm	36.4mm	36.8mm	29mm	36.5mm	15.8mm	35.3mm
	FOCUS DIAMETER	Φ81.6mm									
	APERTURE DIAMETER	Φ70.4mm	Φ73.6mm								

Drawing

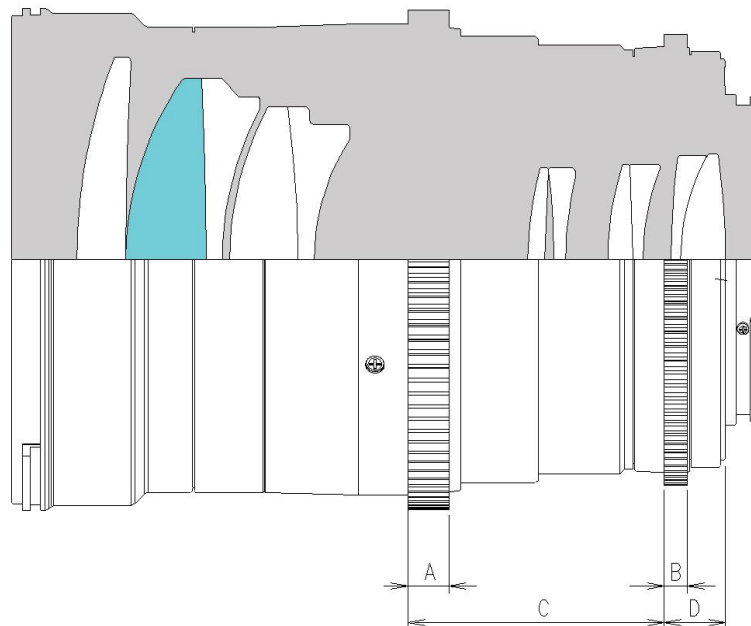

ED

**SAMYANG**

Samyang Optics R&D Center  
Copyright © 2014-0