



Professional Photographic Equipment

INSTRUCTIONS

P Series Monopod




SIRUI Photographic Equipment Industry (Zhongshan) CO., Ltd

Address: The Third Industrial District, Wujiahan Town, Zhongshan City, Guangdong, China
E-mail: info@sirui-photo.com Http://www.sirui-photo.com Http://www.sirui.com
Tel: 0086-740-8897373 Fax: 0086-740-8897392 P.O: 538458
Service Hotline: 0086400 638 2299

P Series Monopod Data Chart

		Max Load kg/lb	Weight kg/lb	Max Height mm/inch	Min Height mm/inch	Max Dia mm/inch	Section
		10/22.0	0.6/1.3	550/21.7	1700/66.9	28/1.1	P-204
		10/22.0	0.5/1.1	550/21.7	1700/66.9	28/1.1	P-224
		10/22.0	0.6/1.3	550/21.7	1690/66.5	32/1.3	P-324
		15/33.1	0.6/1.3	580/22.0	1700/66.9	36/1.4	P-424

1. Know your monopod

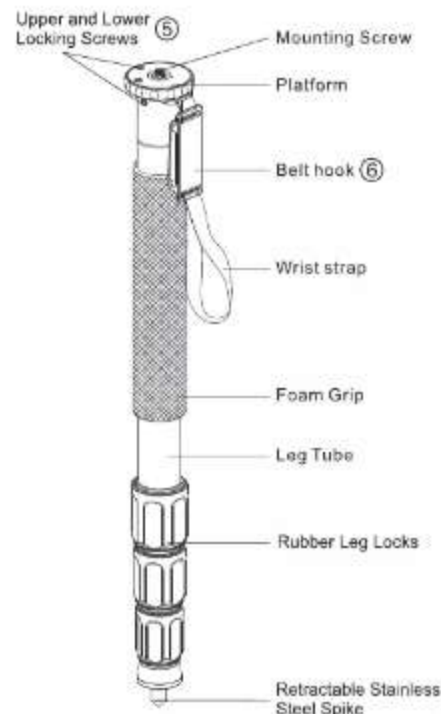

1. Know your monopod

2. Leg Extension and Closing

As shown in Figure 2, twist the rubber leg locks about 90 degrees in a clockwise direction ("a"), adjust the leg sections to the desired length and tighten the rubber leg locks by turning them in a counter-clockwise direction ("c").

3. Retractable Stainless Steel Spike

Twist the Rubber foot in a counter-clockwise direction ("a"), until the spike is fully extended; to retract the spike, turn in a clockwise direction ("c") until the spike is hidden.

4. Converting the Mounting Screw from 3/8" to 1/4"

Most cameras and lens tripod sockets require a 1/4" screw, while many ball heads and medium format cameras require a 3/8" screw. As show in Figure 1, loosen the Mounting Platform by turning it counter-clockwise ("a"), then twist the Mounting Screw out completely ("b"), flip the screw (Figure 2), twist it back into the monopod (turn clockwise) and hand tighten with the Mounting Platform ("c").


5. Locking Screws

Using the allen key, gently twist the upper locking screw (on the mounting platform) into the base of the attached ball head for added stability. Twist the lower locking screw (on the leg of the monopod) to make the mounting plate more stable. Loosen if you wish to convert the mounting screw.


6. Belt Hook

Close the monopod when work is finished, you can easily carry your monopod by attaching the Belt Hook onto your belt.

2. Leg Extension and Closing



3. Retractable Stainless Steel Spike



4. Converting the Mounting Screw from 3/8" to 1/4"



Figure 2




Figure 1




Figure 3

Attention:

- Do not exceed the recommended load limit of the head and/or monopod. (Please refer to product specifications)
- Please make sure that the locks are securely tightened when in use. For added safety, please put your wrist through the wrist strap when using the monopod.
- This product should not be used in environments that exceed the following conditions (-40 ~ +100°C / -40 ~ +212°F). And, when used in damp, dirty or dusty environments, please clean and dry thoroughly after use, to assure proper functioning in the future. It is not recommended to expose this product to saltwater. If exposed, please clean with mild soap and warm water and towel dry.
- Please keep from high temperatures and direct exposure to bright sunlight for extended periods of time.
- Please do not leave the equipment alone in a public place, which can be an inconvenience or hazard to others.
- To protect your camera gear, please remove it from the tripod/ball head when transporting from place to place.
- Please use a soft towel with mild soap to clean the loading system and gliding parts, when necessary.
- Under most situations, there is no need to lubricate any parts of this product. The addition of most lubricants will gum up the mechanisms and reduce their normal gliding characteristics. Please call or email us if you have any questions or special needs.
- Please keep this product away from all electrical power sources.



CAUTION!

Do not place the monopod with camera attached, over your shoulder or carry the monopod vertically by the leg, strong shaking may cause damage at the screw or the mounting plate within the camera. Please ensure the legs reach the biggest hole to complete fully. Check the legs from the outside tube to support tube, to avoid leg joint locking damage.

Specifications are subject to change without notice.